

Introduction to Python

Genome 559: Introduction to Statistical
and Computational Genomics

Prof. James H. Thomas

If you have your own PC, download and install a syntax-highlighting text editor and Python 2.6.6:

<http://www.flos-freeware.ch/notepad2.html>

<http://www.python.org/download/releases/2.6.6/>

If you have your own Mac, download Python (same site) and TextWrangler:

<http://www.barebones.com/products/TextWrangler/download.html>

Why Python?

- Python is
 - easy to learn
 - relatively fast
 - object-oriented
 - widely used
 - fairly portable
- C is much faster but much harder to learn and use.
- Java is somewhat faster and harder to learn and use.
- Perl is a little slower and not as easy to learn.

Getting started on the Mac

- Start a terminal session
- Type "python"
- This should start the Python interpreter (often called "IDLE")

```
> python
```

```
Python 2.6.4 (something something)
```

```
details something something
```

```
Type "help", "copyright", "credits" or "license"  
for more information.
```

```
>>> print "Hello, world!"
```

```
Hello, world!
```

The interpreter


- Try printing various things (in your spare time)
 - Leave off the quotation marks.
 - Print numbers, letters and combinations.
 - Print two things, with a comma between.
 - Enter a mathematical formula.
 - Leave off the word "print".
- The interpreter allows you to try things out interactively and quickly.
- Use the interpreter to test syntax, or to try commands that you're not sure will work when you run your program.

Your first program

- In your terminal, Ctrl-D out of the python interpreter.
- Type "pwd" to find your present working directory.
- Open TextWrangler.
- Create a file containing one line:
`print "hello, world!"`
- Be sure that you end the line with enter.
- Save the file as "hello.py" in your present working directory.
- In your terminal, type "python hello.py"

```
> python hello.py  
hello, world!
```

(This tells the computer "use python to run the program hello.py".
Yes, the result is somewhat anticlimactic.)

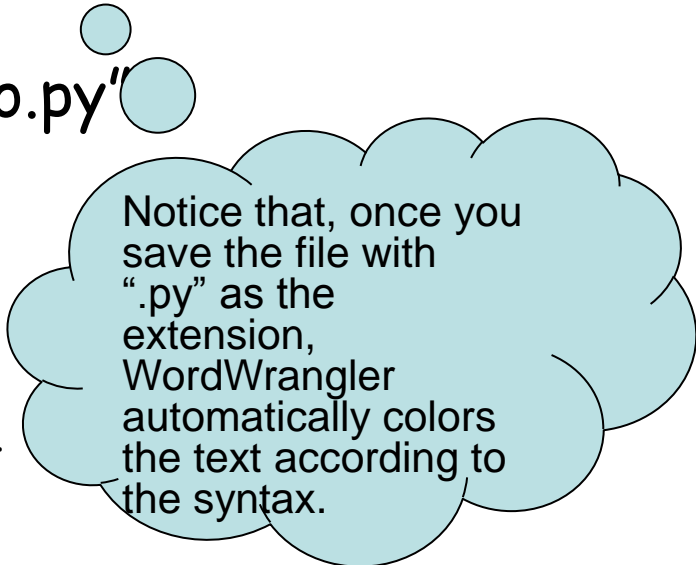

Notice that, once you save the file with ".py" as the extension, WordWrangler automatically colors the text according to the syntax.

Objects and types

- We use the term object to refer to any entity in a python program.
- Every object has an associated type, which determines the properties of the object.
- Python defines six main types of built-in objects:

Number	10 or 2.71828
String	"hello"
List	[1, 17, 44] or ["pickle", "apple", "scallop"]
Tuple	(4, 5) or ("homework", "exam")
Dictionary	{"food": "something you eat", "lobster": "an edible arthropod"}
File	more on this one later...

notice the different
symbols used to
define each type

- Each type of object has its own properties, which we will learn about in the next few weeks.
- It is also possible to define your own types, comprised of combinations of the six base types.

Literals and variables

- A variable is simply a name for an object.
- For example, we can assign the name "pi" to the Number object 3.14159, as follows:

```
>>> pi = 3.14159
```

```
>>> print pi
```

```
3.14159
```

- When we write out the object directly, it is a literal, as opposed to when we refer to it by its variable name. Above, 3.14159 is a literal, pi is a variable.

Assignment operator

```
>>> pi = 3.14159
```


The '=' means assign the value 3.14159 to the variable `pi`. (it does NOT assert that `pi` equals 3.14159)

```
>>> pi = 3.14159
```

```
>>> pi = -7.2
```

```
>>> print pi
```

```
-7.2
```



you can see where
"variable" comes from -
pi can be changed

The `import` command

- Many python functions are available only via "packages" that must be imported (other functions are always available - called "built-in").

```
>>> print log(10)
Traceback (most recent call last):
  File foo, line 1, in bar
NameError: name 'log' is not defined

>>> import math
>>> print math.log(10)
2.30258509299

>>> print log(10)
Traceback (most recent call last):
  File foo, line 1, in bar
    print log(10)
NameError: name 'log' is not defined
```

foo and bar mean
something-or-
other-goes-here

for now don't worry about
the details of the error
message - just be aware that
this means there is an error
in your program.

The command line

- To get information into a program, we can use the command line.
- The command line is the text you enter after the word "python" when you run a program.

`python my-program.py 17`

- The zeroth argument is the name of the program file.
- Arguments larger than zero are subsequent space-delimited elements of the command line.



zeroth
argument

first
argument

Reading command line arguments

Access in your program like this:

```
import sys
print sys.argv[0]
print sys.argv[1]
```



zeroth
argument



first
argument

```
> python my-program.py 17
my-program.py
17
```

There can be any number of arguments, accessed by sequential numbers (`sys.argv[2]` etc).

Sample problem #1

- Write a program called "print-two-args.py" that reads the first two command line arguments after the program name, stores their values as variables, and then prints them on the same line with a colon between.
- Use the python interpreter for quick syntax tests if you want.

```
> python print-two-args.py hello world  
hello : world
```

Hint - to print multiple things on one line, separate them by commas:

```
>>> print 7, "pickles"  
7 pickles
```

Solution #1

```
import sys
arg1 = sys.argv[1]
arg2 = sys.argv[2]
print arg1, ":", arg2
```

Sample problem #2

- Write a program called "add-two-args.py" that reads the first two command line arguments after the program name, stores their values as variables, and then prints their sum.

```
> python add-two-args.py 1 2  
3.0
```

Hint - to read an argument as a decimal number, use the syntax:

```
foo = float(sys.argv[1])
```


or for an integer number:

```
bar = int(sys.argv[1])
```

The technical name for this is "casting" - the argument starts as a string object and is cast to a float or int object.

Solution #2

```
import sys
arg1 = float(sys.argv[1])
arg2 = float(sys.argv[2])
print arg1 + arg2
```

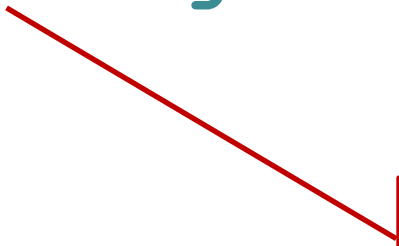

notice that this
expression gets evaluated
first, then printed

Challenge problems

Write a program called "circle-area.py" that reads the first command line argument as the radius of a circle and prints the area of the circle.

```
> python circle-area.py 15.7  
774.371173183
```

Do the same thing but read a second argument as the unit type and include the units in your output.

```
> python circle-area2.py 3.721 cm  
43.4979923683 square cm
```

Challenge solutions

```
import sys
radius = float(sys.argv[1])
print 3.1415 * radius * radius
(or slightly better)
import sys
import math
radius = float(sys.argv[1])
print math.pi * radius * radius
```

```
import sys
import math
radius = float(sys.argv[1])
units = sys.argv[2]
print math.pi * radius * radius, "square", units
```



recall this is how you
enter a literal string

Reading

- Chapter 1 of *Think Python* by Downey.
- Legal free PDF linked on web site.